



Voltage Tuned Oscillator


VTO-053-42T

Features

- Operating frequency:
4.2GHz to 6.5 GHz
- Output Power (50 Ω Load):
7 dBm Minimum
- Modulation Sensitivity:
150 to 300 MHz/V
- Tuning Voltage: 1 to 20
Volts
- Low Phase Noise:
< -95 dBc/Hz@100 KHz
- Low Power Consumption
- 0.5 D x 0.18 H inches

Applications


- High Speed
Communication systems
- Digital Radios
- Low Noise Source



General Description

The VTO-053-42T provides a fundamental, low noise wideband source for applications in wireless and high-speed communication systems. The oscillator uses a high performance low noise Silicon Bipolar transistor in conjunction with a hyperabrupt varactor diode to provide the tuning capability. A GaAs FET buffer amplifier is used to achieve necessary power output and load isolation.

Package Mechanical Dimensions (Inches)

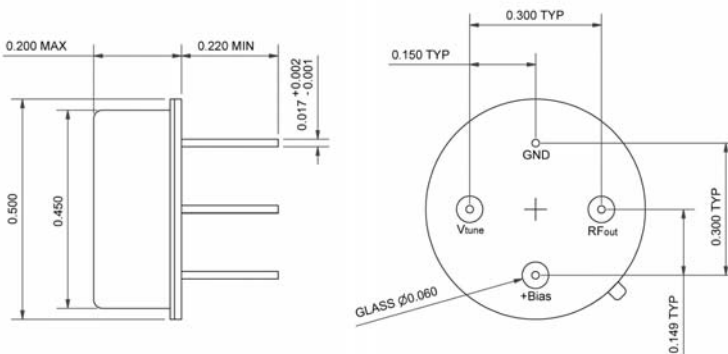

VTO-053-42T Absolute Maximum Ratings

Parameter	Units	Ratings
Positive Supply Voltage	V	12
Tuning Voltage	V	22
Operating Temperature	°C	-10 to 95
Storage Temperature	°C	-40 to +125

VTO-053-42T Summary Electrical Specifications, 0° C to 75° C

Parameter	Units	Min	Typ	Max
Frequency Range	GHz	4.2		6.5
Vt @ 4.2 GHz	V	0.5		
Vt @ 6.5 GHz	V			20
Output (50 Ω Load)				
Power	dBm	7		13
Voltage p-p	V	1.4		2.8
Tuning Sensitivity	MHz / V	150		300
Modulation Bandwidth	MHz	20		
Output Return Loss	dB	12	14	
Second Harmonic (Below Carrier)	dBc			-10
Third Harmonic (Below Carrier)	dBc			-10
Spurious Output (Below Carrier)	dBc			-60
Phase Noise @				
100 KHz from F _o	dBc / Hz		-95	-90
10 MHz from F _o	dBc / Hz			-135
Frequency Drift over Temperature	MHz			50
Pulling Figure (12 dB Return Loss)	MHz			25
Pushing Figure, +/- 0.2V Supply	MHz			15
Positive Supply Voltage	V	9.7	10	10.3
Positive Supply Current	mA			100
Tuning Port Input Capacitance	pf		23	

Contact Factory for any changes in specifications.

Part Number Ordering Information

Part Number
VTO-053-42TS

For more information:
 Phase Matrix Inc.
 109 Bonaventura Dr.
 San Jose, California
 95134 - 2106 USA
 TEL: +1 (408) 428.1000
sales@phasematrix.com
 Data subject to change