



# Voltage Tuned Oscillator


## VTO-105-20T

### Features

- Operating frequency: 9.5GHz to 11.5 GHz
- Output Power (50 Ω Load): 7 dBm Minimum
- Modulation Sensitivity: 125 to 250 MHz/V
- Tuning Voltage: 0.5 to 20 Volts
- Low Phase Noise: < -85 dBc/Hz @100 KHz
- Low Power Consumption
- Frequency Drift over 0°C to +75°C: 100 MHz
- 0.5 D x 0.18 H inches

### Applications


- Transmitter and Receiver Subsystems for OC-192, OC-768 / STM-64, STM-256
- Digital Radios
- Low Noise Source



### General Description

The VTO-105-20T provides a fundamental, low jitter source for the data re-timing in the transmitter subsystem and clock and data recovery in the receiver of the 10 Gigabit fiber optic systems. This oscillator offers a unique combination of low jitter and wide bandwidth to cover all the common FECs used in 10Gigabit systems. The oscillator uses a high performance low noise Silicon Bipolar transistor in conjunction with a hyperabrupt varactor diode to provide the tuning capability. A GaAs FET buffer amplifier is used to achieve necessary power output and load isolation.

### Package Mechanical Dimensions (Inches)

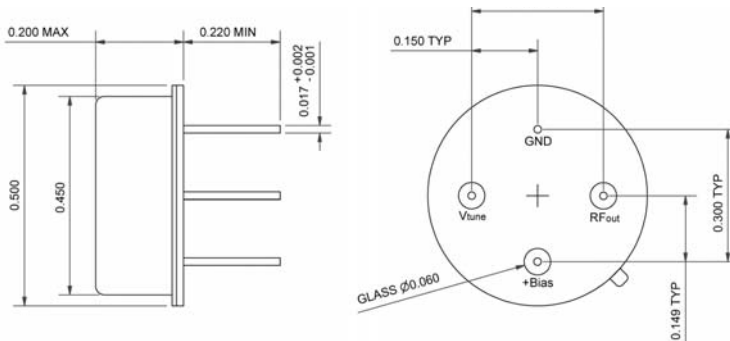

### VTO-105-20TS Absolute Maximum Ratings

Parameter	Units	Ratings
Positive Supply Voltage	V	6
Tuning Voltage	V	22
Operating Temperature	°C	-10 to 85
Storage Temperature	°C	-40 to +125

**VTO-105-20T Summary Electrical Specifications, 0° C to 75° C**

Parameter	Units	Min	Typ	Max
Frequency Range	GHz	9.5		11.5
Vt @ 9.5 GHz	V	0.5		
Vt @ 11.5 GHz	V			20
Output ( 50 $\Omega$ Load)				
Power	dBm	7		13
Voltage p-p	V	1.4		2.8
Tuning Sensitivity	MHz / V	125		250
Modulation Bandwidth	MHz	20		
Output Return Loss	dB	12	14	
Second Harmonic (Below Carrier)	dBc			-17
Third Harmonic (Below Carrier)	dBc			-17
Spurious Output (Below Carrier)	dBc			-60
Phase Noise @				
100 KHz from F <sub>o</sub>	dBc / Hz		-90	-85
10 MHz from F <sub>o</sub>	dBc / Hz			-130
Frequency Drift over Temperature	MHz			100
Pulling Figure (12 dB Return Loss)	MHz			30
Pushing Figure, +/- 0.2V Supply	MHz			20
Positive Supply Voltage	V	4.8	5	5.2
Positive Supply Current	mA			100
Tuning Port Input Capacitance	pf		23	

**Contact Factory for any changes in specifications.**

**Part Number Ordering Information**

<b>Part Number</b>
VTO-105-20T

**For more information:**  
 Phase Matrix Inc.  
 109 Bonaventura Dr.  
 San Jose, California  
 95134 - 2106 USA  
 TEL: +1 (408) 428.1000  
[sales@phasematrix.com](mailto:sales@phasematrix.com)  
 Data subject to change